


# Double Wires Nose Wire

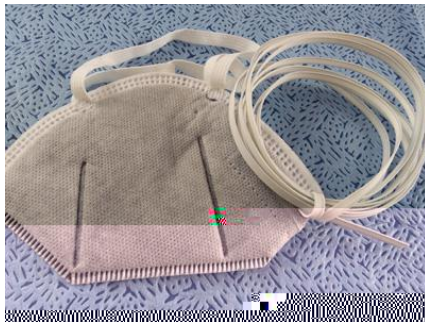

## The Overview of Double Wires Nose Strip

# The Specification of Two Wires Nose Strip

Material: Polypropylene	Thickness:0.9-1.2mm	Length/KG: 200m-220m
CBM/ Ton: 2	Packing Quantity: 2 Rolls/CTN ,10kg/CTN	Width: 2.58.0mm
Split Joint Times: ≤2	CTN size: 35cm*35cm*25cm	Application: Surgical Face Masks
Loading Port: Shanghai China	20GP/40HQ Q'ty: 12 Tons/35Tons	Brand Name: <b>SENCI</b>
Certificate:SGS,MSDS,RoHS	MOQ: 500 KGS	Supply Ability: 200 Ton /Month

# Nose Strip with Two Metal Features

## **Two Metal Nose Strip Application**

## **Wire Nose Clip Types**

One-wire	Virgin PP material, stainless steel wire or galvanized iron, 2.5-4.0mm width 0.9-1.2mm thickness	Length/KG: 200m-220m
Double-wires	Virgin pp material, stainless steel wire or galvanized iron, 2.5-8.0mm width 0.9-1.2mm thickness	Width: 2.5-8.0mm
Full plastic	Virgin PE material, 2.8-3.2mm width 0.6-0.9mm thickness	Application: Surgical Face Masks
Full aluminum	Soft aluminum, 3mm-5mm width,0.5-0.85mm thickness, can be packed with or without a plastic spool	Brand Name: <b>SENCI</b>
Certificate:SGS,MSDS,RoHS	MOQ: 500 KGS	Supply Ability: 200 Ton /Month

## Nose Wire Description




1. Configure and mix the raw materials



2. Extruded the plastic strip



3. Cooling down the temperature



4. Stretching and roll forming



5. Cooling down the temperature for the second time



6. Dry the nose strip and rolling and packing