ES Non Woven Fabric

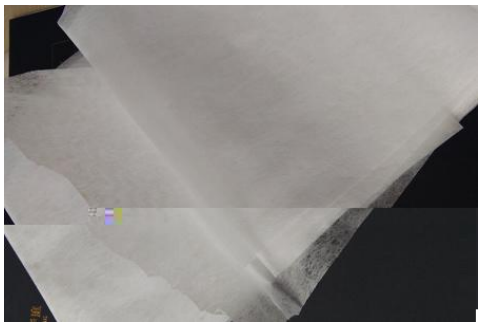

The Overview of ES Non Woven Fabric

The Specification of ES Non Woven Fabric

Weight: 16g/sm-70g/sm	Maximum Width: 1.6m,3.2m	Machine Type: Import
Colors: All Colors Available	Length: By Request	Packing: Wrap Film
Material: 100% ES (PP+PE & PET+PE)	Width Tolerance: ±3mm	Weight Tolerance: ±0.5g/sm
Split Joint Times: ≤1	Polymer Clump: ≤2 PCS/50㎡	Embossing: Diamond Type
Loading Port: Shanghai China	20GP/40HQ Q'ty:7 Tons/16.5Tons	Brand Name: **SENCI**
Certificate: SGS, MSDS, RoHS	MOQ: White 1 Ton	Supply Ability: 2000 T/Month

Product Features

Product Application

Product Types

PP+PE:	16g/sm—25g/sm for surgical face masks dull light with press polish.
PET+PE	25g/sm –60g/sm for composite nonwoven and aluminum film composite bag, heat-sealable tea bag and other packaging material, air filter and water filter material.

Process Description

1. Feeding the ES fibers

2. Loosening the fiber raw material

3. Carding the fibre web and make sure it is place neatly and orderly

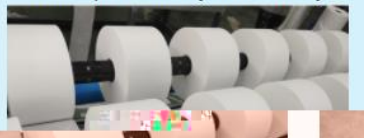

shaped fibre mesh passes
gh the calendar and make
ore web bond and finalize
esign

5. Rolling up

6. Cut off the burrs on both sides,packing in rolls by PE bag and shrinkable film

4. Th
throu
the f
the c