
## **Full Aluminimum Nose Wire**

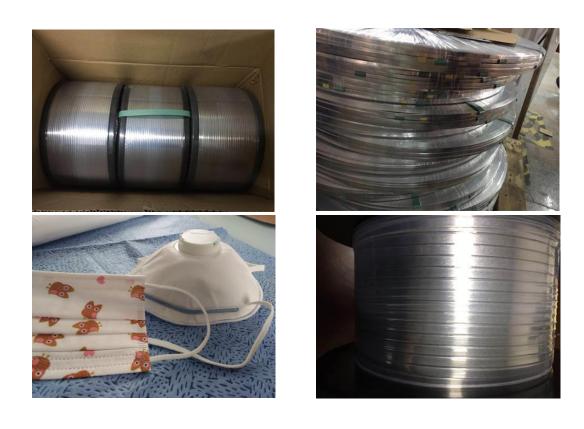

The Overview of Full Aluminimum Nose Wire

## The Specification of Full Aluminium Nose Strip

Material: Soft Aluminium	Thickness: 0.5-0.85mm	Length/KG: 200m-220m
CBM/ Ton: 2	Packing Quantity: 2 Rolls/CTN ,10kg/CTN	Width: 3.0-5.0mm
Split Joint Times: <u>≤</u> 2	CTN size: 35cm*35cm*25cm	Application: Surgical Face Masks, N95 Face Maks, FFP2 Face Mask
Loading Port: Shanghai China	20GP/40HQ Q'ty:13 Tons/35Tons	Brand Name: SENCI
Certificate: SGS,MSDS,RoHS	MOQ: 500 KGS	Supply Ability: 200 Ton /Month

## **Soft Aluminum Wire Features**

**Nose Wire Aluminum Application** 

**Nose Wire Types** 

One-wire	Virgin PP material, stainless steel wire or galvanized iron, 2.5-4.0mm width 0.9-1.2mm thickness	Length/KG: 200m220m
Double-wires	Virgin pp material, stainless steel wire or galvanized iron, 2.5-8.0mm width 0.9-1.2mm thickness	Width:3.0-5.0mm
Full plastic	Virgin PE material, 2.8-3.2mm width 0.6-0.9mm thickness	Application: Surgical Face Masks, N95 Face Maks, FFP2 Face Mask
Full aluminum	Soft aluminum, 3mm-5mm width, 0.5-0.85mm thickness, can be packed with or without a plastic spool	Brand Name: <b>SENCI</b>
Certificate: GS,MSDS <mark>_RoH:</mark>	MOQ: 500 KGS	Supply Ability: 200 Ton /Month

## **Flat Aluminum Wire Description**

